

MSP 200PRO

PROAV Singal Monitor&Generator




Key Features

- Touch Screen control
- Output a range of signal types
- Set and select from a range of common output formats
- Audio Output test included
- Genlock Y & HS outputs
- Input live signals for preview and inspection
- On Board Test Pattern Generator
- On board Time Code Generator
- Genlock Y Input
- Remote Control via USB connection
- Preview digital input source on the display
- Output (pass through) digital input source for signal testing


Specification

Connectors	Input	Standard		Optional		
			HDMI	1×HDMI-A	SDI	1×BNC
		Genlock	1×BNC			
		USB Media	1×USB-A			
	Output	SDI	1×BNC	Genlock Y VS/HS	2×BNC	
		DVI	1×DVI-I	Audio	1×3.5mm Stereo Jack	
		CVBS	1×BNC			
	Communication	USB 1×USB-B				
	Power	1×DC Jack				
Performance	Input Resolutions	HDMI	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60			
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1600×1200@60 1920×1080@60			
	Output Resolutions	SDI	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60			
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60			
	VESA	640×480@60/75/85 800×600@60/75/85 1024×768@60/75/85 1280×800@60 1280×1024@60/75/85 1360×768@60 1366×768@60 1440×1050@60 1680×1050@60 1920×1080@60				
Supported Standard	HDMI	1.3	DVI	Single Link	USB 2.0	
	USB	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI				
Power	External	Input Voltage	DC12V (Via Plug Pack)			
		Max Power	12W			
Battery (Optional)	Type	Lithium Ion	Quantity	2PCS		
		Cell	18650	Voltage	3.7V	
		Capacity	1500Mah	Recharge Time	1hr	
		Size	65mm (length) ×18mm (dia)			
Environment	Working Temperature	-0 ~45℃				
	Humidity	10 - 85%				
Physical	Weight	Net (Device) 0.83kg				
	Dimensions	Net (Device) 219mm×148.5mm×32mm				

Application

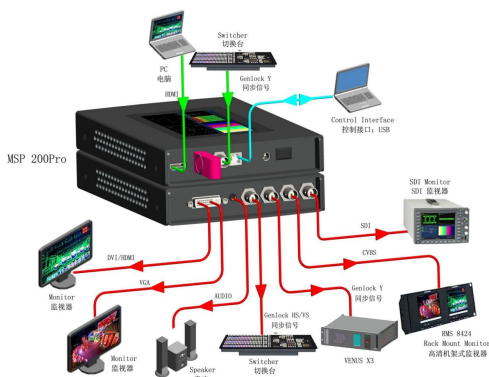

Dimension

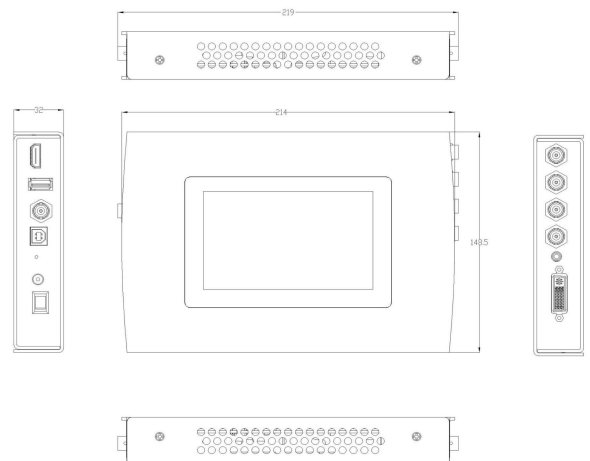

Order Codes

Product Code	Item
650-0200-01-0	MSP 200PRO
490-5353-01-0	SDI Input Module-MSP 200PRO

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

