

### Features


- DisplayPort connection for resolutions up to 4K / UltraHD @60Hz
- Full audio support incl. DTS-HD™ and Dolby TrueHD™
- AWG28 with 7.3mm outer cable diameter
- High purity tinned OFC copper conductors and triple shielding
- Especially suitable for professional applications and installations



### Specifications

#### Connections

Connector material	PVC
Contact material	24 carat gold-plated
Shielding	Yes
Connector 1	DisplayPort Male (20pin)
Connector 1 dimensions	53.0 x 20.0 x 11.0 (mm)
Connector 2	DisplayPort Male (20pin)
Connector 2 dimensions	53.0 x 20.0 x 11.0 (mm)

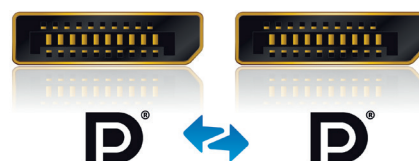

#### Cable

Type	Round cable
Length	1.00m   1.50m   2.00m   3.00m   3.50m   4.00m   5.00m
Inner conductor material	High purity tinned OFC Copper
AWG	AWG28
Number of shieldings	Triple shielded
Shielding 1	Aluminium foil (100% sealed)
Shielding 2	Aluminium foil (100% sealed)
Shielding 3	Mesh (100% sealed)
Outer material	High flexible PVC
Outer diameter	7.3mm



#### Signal Transmission

Transmission modes	Digital audio and video signals
Max. bandwidth	750 MHz
Max. data rate	21.6 Gbps
Max. resolution	UltraHD / 4K (3840x2160) @60Hz
Supported Colors	16/24 bit RGB/YUV, Deep Color, x.v.Color™
Supported audio standards	Audio-Return-Channel (HEC), Dolby Digital Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD Audio, SA-CD
Further standards	FullHD (1080i/p), HD ready (720i/p), SDTV (480i/p)



### Product Overview

Part Number	Color	Length	EAN	Quantity (PU)	Weight (PU, gross)	Size PU
PI5000-010	black	1.00 m	4260134118750	41 x 30 x 30 cm	10.4 kg	100
PI5000-015	black	1.50 m	4260134118767	41 x 30 x 30 cm	7.1 kg	50
PI5000-020	black	2.00 m	4260134118774	41 x 30 x 30 cm	8.3 kg	40
PI5000-030	black	3.00 m	4260134118781	41 x 30 x 30 cm	7.7 kg	30
PI5000-035	black	3.50 m	4251364710616	41 x 30 x 30 cm	7,7 kg	30
PI5000-040	black	4.00 m	4251364712139	41 x 30 x 30 cm	7,7 kg	30
PI5000-050	black	5.00 m	4260134126953	41 x 30 x 30 cm	8,0 kg	20

