

### Features


- DisplayPort connection for resolutions up to WQXGA (2560x1600)
- Full audio support incl. DTS-HD™ and Dolby TrueHD™
- AWG24 with 10.5mm outer cable diameter
- High purity tinned OFC copper conductors and triple shielding
- Especially suitable for professional applications and installations



### Specifications

#### Connections

Connector material	PVC
Contact material	24 carat gold-plated
Shielding	Yes
Connector 1	DisplayPort Male (20pin)
Connector 1 dimensions	53.0 x 20.0 x 11.0 (mm)
Connector 2	DisplayPort Male (20pin)
Connector 2 dimensions	53.0 x 20.0 x 11.0 (mm)

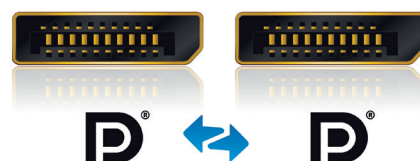

#### Cable

Type	Round cable
Length	7.50m   10.00m   12.50m   15.00m   20.00m   25.00m   30.00m
Inner conductor material	High purity tinned OFC Copper
AWG	AWG24
Number of shieldings	Triple shielded
Shielding 1	Aluminium foil (100% sealed)
Shielding 2	Aluminium foil (100% sealed)
Shielding 3	Braid (100% sealed)
Outer material	High flexible PVC
Outer diameter	10.5mm



#### Signal Transmission

Transmission modes	Digital audio and video signals
Max. bandwidth	360 MHz
Max. data rate	10.8 Gbps
Max. resolution	2560x1600 (WQXGA)
Supported Colors	16/24 bit RGB/YUV, Deep Color, x.v.Color™
Supported audio standards	Audio-Return-Channel (HEC), Dolby Digital Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD Audio, SA-CD
Further standards	FullHD (1080i/p), HD ready (720i/p), SDTV (480i/p)



### Product Overview

Part Number	Color	Length	EAN	Quantity (PU)	Weight (PU, gross)	Size PU
PI5000-075	black	7.50 m	4260134126960	41 x 30 x 30 cm	9.1 kg	8
PI5000-100	black	10.00 m	4260134126977	41 x 30 x 30 cm	11.5 kg	8
PI5000-125	black	12.50 m	4260134126984	41 x 30 x 30 cm	14.1 kg	8
PI5000-150	black	15.00 m	4260134126991	41 x 30 x 30 cm	12.5 kg	6
PI5000-200	black	20.00 m	4260134127004	41 x 30 x 30 cm	11.2 kg	4
PI5000-250	black	25.00 m	4260134127011	41 x 30 x 30 cm	10.5 kg	3
PI5000-300	black	30.00 m	4260134127028	41 x 30 x 30 cm	8.5 kg	2